


Offer Sheet

Product	Defoamer Industrol (DF – 204) (Specialty Silicone-Free Organic Defoamer)
Quantity	14 pallets (55-gallon drums)
Net weight	~25,200 lbs.
Manufacture date	
Availability	One time
Location	Chicago, IL
Date	8/5/26
COA & SDS	Attached below

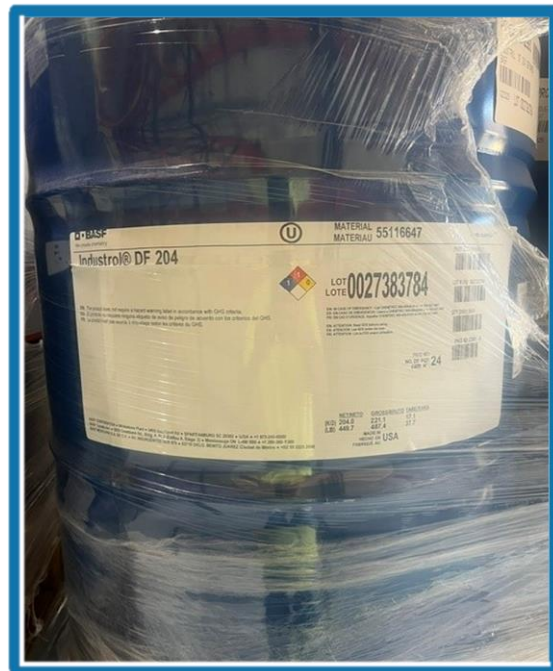

Brian Svrusis
Solvent Systems International
575 Bennett Road
Elk Grove Village, IL 60007
847-323-6718 call or text
Click here for: [Surplus Inventory](https://www.solvent-systems.com)
[Solvent-Systems.com](https://www.solvent-systems.com)

Industrol® DF-204 is a **specialty organic defoamer (antifoam agent)** developed by BASF. It is **silicone-free and mineral oil-free**, making it suitable for formulations where silicone contamination or mineral oil residues are undesirable. BASF specifically identifies it as a defoamer for **adhesive applications**.

Primary Commercial Uses

Industry	Application	Demand
Adhesive manufacturing	Controls foam during production and application	★★★★★
Pressure-sensitive adhesives	Labels, tapes, films	★★★★★
Packaging adhesives	Carton sealing, laminating	★★★★☆
Wood adhesives	PVA and specialty wood glues	★★★★☆
Construction adhesives	Flooring, panel, and assembly adhesives	★★★★☆
Paper converting	Adhesive coatings	★★★★☆
Textile adhesives	Fabric laminating	★★★☆☆
Specialty polymer formulations	Foam control during mixing	★★★☆☆

Why a Defoamer Is Used

Foam is a common problem during:

- High-speed mixing
- Pumping
- Filling
- Packaging
- Application of adhesives

Excess foam can cause:

- Air entrapment
- Surface defects
- Poor bond strength
- Inconsistent coating thickness
- Slower production rates

A defoamer like DF-204 breaks foam bubbles quickly and prevents new foam from forming, improving process efficiency and product quality.

Industries Most Likely to Purchase

The strongest target markets include:

Adhesive Manufacturers

- Pressure-sensitive adhesive producers
- Label adhesive manufacturers
- Packaging adhesive formulators
- Wood glue manufacturers
- Industrial assembly adhesive producers

Specialty Chemical Manufacturers

- Water-based polymer formulators
- Acrylic emulsion manufacturers
- Vinyl acetate emulsion producers
- Latex formulators

Toll Blenders

Companies that manufacture adhesives and specialty chemicals for third parties.

Chemical Distributors

Distributors specializing in:

- Adhesive additives
- Formulation additives
- Performance chemicals
- Industrial processing aids

Surplus Market Assessment

Marketability: 8/10

Strengths

- BASF-branded specialty additive
- Consumable product with recurring demand
- Broad use across adhesive manufacturing
- Drum packaging is attractive for resale

BASF Industrol® DF-204 – Specialty Silicone-Free Organic Defoamer

- Designed for adhesive formulations
- Controls foam during manufacturing and application
- Improves production efficiency and finished-product quality
- Bulk drums available
- COA and lot traceability available (if applicable)

BASF CORPORATION



Certificate of Analysis

Customer:	Product Number : 55116647
BRENNTAG GREAT LAKES INC	Product Name : Industrol® DF 204 204KG Steel
4801 S AUSTIN AVE	drums
CHICAGO IL 60638-1409	Vehicle : 8092
Attention: BGLQCLAB@BRENNTAG.COM	Batch/Lot : 0026821442
eMAIL: bglqclab@brenntag.com	Manuf.Date : Mar-29-2023
Cust Prod: 842991	Shipped Date : Jun-05-2023
Cust Prod Name: Industrol DF 204 204KG 1A1 BM	Shipped Quantity : 24 PCA
Cust P.O.: 450204	Delivery Date : Jun-06-2023
Cust P.O. Line: 10	Order Number : 119264104 000010
Manufacturing Location : US, SC, 29302 SPARTANBURG, 3455 Southport Rd	Delivery Note : 147488680 900002

Inspection Certificate 3.1 according to EN 10204

Characteristic	Result	UOM	—Specification—		Test Method
			Minimum	Maximum	
Appearance	Clear liquid				QCM 113
CLOUD POINT 1% Aq Soln	19		18	21	QCM 120
Color, APHA	6	P/Co.	0	70	QCM 121
Foreign Matter	None				QCM 128
pH, Apparent in 80:20 Methanol:Water	5.68		5.00	7.50	Methanol : Water = 80 : 2
Specific Gravity	1.010		1.010	1.030	QCM 164
Water % by Karl Fischer	0.16	Weight %	0.00	0.30	QCM 172

Comments :

Page 1 of 1

The information contained herein is based either on analytical tests of samples or on statistical process data; it is intended solely for purposes of comparison with the established specifications for the product. Warranties of the product are exclusively as set forth in the applicable contract documents.

THIS CERTIFICATE OF ANALYSIS HAS BEEN PRODUCED ELECTRONICALLY AND IS VALID WITHOUT A SIGNATURE

I-Lot: 010002398816

Material:

20032514

Lab Location:

1195_QC-TL60

DEFOAMER, INDUSTROL DF-204

NC-Raw Materials Lab

GLCA2023013519



10307118

Batch: 1000631459

NC-Raw Materials Lab

Amount:

100 ml

Storage:

Tight Container

Run#:

Misc Raw Material

0026821442

Attached To:

WKS.0503 - 9-73

Envarano 02 Aug 2023

Esmeralda Navarro

Verified

By

Seth Gudmundson

 * MFG SITE: SPARTANBURG, SC
 * DISTRIBUTOR: BRENNTAG
 * LOT: 0026821442
 * EXP DATE: 03/29/2025
 * BRENNTAG GREAT LAKES, LLC

 * ABBVIE INC
 *
 * PRODUCT CODE: 23265
 * PO: 4300197135
 * MFG NAME: BASF CORP.CARE CHEM&FORMULATOR

IMPORTANT: All information provided is believed to be accurate and complete. The data provided is representative of the product quality on the date of analysis for the lot number indicated. This certificate of analysis may not include all of the constituents of the product. Persons using this information should make their own determination regarding its suitability for their particular application. This certificate of analysis shall not in any way limit or preclude the operation and effect of the applicable terms and conditions of sale.

BASF CORPORATION



Certificate of Analysis

Customer:	Product Number	: 55116647
BRENNTAG GREAT LAKES INC	Product Name	: Industrol DF 204 204KG Steel
4801 S AUSTIN AVE		drums
CHICAGO IL 60638-1409	Vehicle	: 7844
	Batch/Lot	: 0027383784
	Manuf. Date	: Jul-09-2023
Attention:	Shipped Date	: Jul-21-2023
BGLQCLAB@BRENNTAG.COM	Shipped Quantity	: 12 PCA
eMAIL:	Delivery Date	: Jul-18-2023
bglqclab@brenntag.com	Order Number	: 119342084 000080
Cust Prod:		
842991	Delivery Note	: 147578884 900014
Cust Prod Name:		
Industrol DF 204 204KG 1A1 BM		
Cust P.O.:		
453481		
Cust P.O. Line:		
80		
Manufacturing Location		
US, SC, 29302 SPARTANBURG, 3455 Southport Rd		

Inspection Certificate 3.1 according to EN 10204

Characteristic	Result	UOM	—Specification—		Test Method
			Minimum	Maximum	
Appearance	Clear liquid				QCM 113
CLOUD POINT 1% Aq Soln	19		18	21	QCM 120
Color, APHA	4	Pt/Co.	0	70	QCM 121
Foreign Matter	None				QCM 125
pH Apparent in 80:20 Methanol:Water	7.01		5.00	7.50	Methanol : Water = 80 : 2
Specific Gravity	1.010		1.010	1.030	QCM 184
Water % by Karl Fischer	0.08	Weight %	0.00	0.30	QCM 172
Viscosity	204	cSt	185	210	QCM 262
NEXT INSPECTION DATE	-	Jul-08-2025			

Comments :

VERIFIED BY
Carlos Pacheco
Carlos Pacheco

I-Lot: 010002448899

Batch: 1000652596
 NC-Raw Materials Lab
 Amount:
 100 ml
 Storage:
 Tight Container

Material:
 20032514
 Lab Location:
 1195_QC-TL60
 DEFOAMER, INDUSTROL DF-204
 NC-Raw Materials Lab

GLCA2023016619



10412149

Run#:
 Misc Raw Material
 0027383784

Page 1 of 1

Jacqueline Ortiz

The information contained herein is based either on analytical tests of samples or on statistical process data; it is intended solely for purposes of comparison with the established specifications for the product. Warranties of the product are exclusively as set forth in the applicable contract documents.

THIS CERTIFICATE OF ANALYSIS HAS BEEN PRODUCED ELECTRONICALLY AND IS VALID WITHOUT A SIGNATURE.

Attached to: DI-04551423
Jacqueline Ortiz 11/07/2023

 * ABBVIE INC *
 *
 * PRODUCT CODE: 23265 *
 * PO: 4300197136 *
 * MFG NAME: BASF *

 * MFG SITE: SPARTANBURG SC *
 * DISTRIBUTOR: BRENNTAG *
 * LOT: 0027383784 *
 * EXP DATE: 07/09/25 *
 * BRENNTAG GREAT LAKES, LLC *

IMPORTANT: All information provided is believed to be accurate and complete. The data provided is representative of the product quality on the date of analysis for the lot number indicated. This certificate of analysis may not include all of the constituents of the product. Persons using this information should make their own determination regarding its suitability for their particular application. This certificate of analysis shall not in any way limit or preclude the operation and effect of the applicable terms and conditions of sale.

BASF CORPORATION



Certificate of Analysis

Customer:		Product Number :	55118847		
BRENNTAG GREAT LAKES INC 4801 S AUSTIN AVE CHICAGO IL 60638-1409		Product Name :	Industrol® DF 204 204KG Steel drums		
		Vehicle :	7844		
		Batch/Lot :	0027383784		
		Manuf.Date :	Jul-09-2023		
		Shipped Date :	Jul-21-2023		
		Shipped Quantity :	12 PCA		
		Delivery Date :	Jul-18-2023		
		Order Number :	110342064 000080		
		Delivery Note :	147578884 900014		
Attention: BGLQCLAB@BRENNTAG.COM					
eMAIL: bglqclab@brenntag.com					
Cust Prod: 842991					
Cust Prod Name: Industrol DF 204 204KG 1A1 BM					
Cust P.O.: 453481					
Cust P.O. Line: 80					
Manufacturing Location US, SC, 29302 SPARTANBURG, 3455 Southport Rd					

Inspection Certificate 3.1 according to EN 10204

Characteristic	Result	UOM	—Specification—		Test Method
			Minimum	Maximum	
Appearance	Clear liquid				QCM 113
CLOUD POINT 1% Aq Soln	19		18	21	QCM 120
Color, APHA	4	Pt/Co.	0	70	QCM 121
Foreign Matter	None				QCM 128
pH Apparent in 60:20 Methanol:Water	7.01		5.00	7.50	Methanol : Water = 60 : 2
Specific Gravity	1.010		1.010	1.030	QCM 164
Water % by Karl Fischer	0.08	Weight %	0.00	0.30	QCM 172
Viscosity	204	cSt	185	210	QCM 262
NEXT INSPECTION DATE	-	Jul-08-2025			

Comments :

<u>I-Lot:</u> 010002650789	<u>Batch:</u> 1000672516
	NC-Raw Materials Lab
<u>Material:</u>	<u>Amount:</u>
20032514	100 ml
<u>Lab Location:</u>	<u>Storage:</u>
1195_QC-TL60	Tight Container
DEFOAMER, INDUSTROL DF-204	
NC-Raw Materials Lab	
GLCA2023019318	<u>Run#:</u>
	Misc Raw Material
10516019	0027383784

Page 1 of 1

The information contained herein is based either on analytical tests of samples or on statistical process data; it is intended solely for purposes of comparison with the established specifications for the product. Warranties of the product are exclusively as set forth in the applicable contract documents.

THIS CERTIFICATE OF ANALYSIS HAS BEEN PRODUCED ELECTRONICALLY AND IS VALID WITHOUT A SIGNATURE.

VERIFIED BY
Jacqueline Ortiz
 Jacqueline Ortiz

Attached to: DT-004552845
Jocelyn LaBuda
 Jocelyn LaBuda

 * ABBVIE INC *
 * *
 * PRODUCT CODE: 23265 *
 * PO: 4300197137 *
 * MFG NAME: BASF CORP.CARE CHEM&FORMULATOR *

 * MFG SITE: SPARTANBURG, SC *
 * DISTRIBUTOR: BRENNTAG *
 * LOT: 0027383784 *
 * EXP DATE: 07/08/25 *
 * BRENNTAG GREAT LAKES, LLC *

IMPORTANT: All information provided is believed to be accurate and complete. The data provided is representative of the product quality on the date of analysis for the lot number indicated. This certificate of analysis may not include all of the constituents of the product. Persons using this information should make their own determination regarding its suitability for their particular application. This certificate of analysis shall not in any way limit or preclude the operation and effect of the applicable terms and conditions of sale.

Safety Data Sheet

Industrol® DF 204

Revision date : 2019/09/12

Version: 4.0

Page: 1/8

(30220078/SDS_GEN_US/EN)

1. Identification

Product identifier used on the label

Industrol® DF 204

Recommended use of the chemical and restriction on use

Recommended use*: Raw material for the chemical-technical industry

Recommended use*: defoamer

Suitable for use in industrial sector: chemical industry

* The "Recommended use" identified for this product is provided solely to comply with a Federal requirement and is not part of the seller's published specification. The terms of this Safety Data Sheet (SDS) do not create or infer any warranty, express or implied, including by incorporation into or reference in the seller's sales agreement.

Details of the supplier of the safety data sheet

Company:

BASF CORPORATION

100 Park Avenue

Florham Park, NJ 07932, USA

Telephone: +1 973 245-6000

Emergency telephone number

CHEMTREC: 1-800-424-9300

BASF HOTLINE: 1-800-832-HELP (4357)

Other means of identification

Synonyms:

DEFOAMERS

Methyl-oxirane polymer with oxirane

2. Hazards Identification

According to Regulation 2012 OSHA Hazard Communication Standard; 29 CFR Part 1910.1200

Classification of the product

No need for classification according to GHS criteria for this product.

No need for classification according to GHS criteria for this product.

Safety Data Sheet

Industrol® DF 204

Revision date : 2019/09/12
Version: 4.0

Page: 2/8
(30220078/SDS_GEN_US/EN)

Label elements

The product does not require a hazard warning label in accordance with GHS criteria.

3. Composition / Information on Ingredients

According to Regulation 2012 OSHA Hazard Communication Standard; 29 CFR Part 1910.1200

Under the referenced regulation, this product does not contain any components classified for health hazards above the relevant cut off value.

4. First-Aid Measures

Description of first aid measures

General advice:

Remove contaminated clothing.

If inhaled:

Keep patient calm, remove to fresh air.

If on skin:

Wash thoroughly with soap and water.

If in eyes:

Wash affected eyes for at least 15 minutes under running water with eyelids held open.

If swallowed:

Rinse mouth and then drink 200-300 ml of water.

Most important symptoms and effects, both acute and delayed

Hazards: No applicable information available.

Indication of any immediate medical attention and special treatment needed

Note to physician

Treatment: Symptomatic treatment (decontamination, vital functions).

5. Fire-Fighting Measures

Extinguishing media

Suitable extinguishing media:

water spray, dry powder, carbon dioxide, foam

Unsuitable extinguishing media for safety reasons:

water jet

Special hazards arising from the substance or mixture

Safety Data Sheet

Industrol® DF 204

Revision date : 2019/09/12
Version: 4.0

Page: 3/8
(30220078/SDS_GEN_US/EN)

Hazards during fire-fighting:
harmful vapours

Evolution of fumes/fog. The substances/groups of substances mentioned can be released in case of fire.

Advice for fire-fighters

Protective equipment for fire-fighting:

Wear a self-contained breathing apparatus in confined areas or when exposed to combustion products.

Further information:

Contaminated extinguishing water must be disposed of in accordance with official regulations.

6. Accidental release measures

Further accidental release measures:

Pack in tightly closed containers for disposal.

Personal precautions, protective equipment and emergency procedures

Use personal protective clothing. Information regarding personal protective measures, see section 8.

Environmental precautions

Do not discharge into drains/surface waters/groundwater.

Methods and material for containment and cleaning up

For small amounts: Pick up with absorbent material (e.g. sand, sawdust, general-purpose binder).

For large amounts: Dike spillage. Pump off product.

Place into suitable container for disposal.

7. Handling and Storage

Precautions for safe handling

Keep container tightly closed. Protect from the effects of light.

Protection against fire and explosion:

Vapours may form ignitable mixture with air. Avoid all sources of ignition: heat, sparks, open flame.

Avoid extreme heat.

Conditions for safe storage, including any incompatibilities

Segregate from acids and bases. Segregate from strong oxidizing agents.

Further information on storage conditions: Keep in a cool place.

8. Exposure Controls/Personal Protection

Advice on system design:

Provide adequate exhaust ventilation to control work place concentrations.

Safety Data Sheet

Industrol® DF 204

Revision date : 2019/09/12
Version: 4.0

Page: 4/8
(30220078/SDS_GEN_US/EN)

Personal protective equipment

Respiratory protection:

Respiratory protection in case of vapour/aerosol release. Particle filter with medium efficiency for solid and liquid particles (e.g. EN 143 or 149, Type P2 or FFP2)

Hand protection:

Chemical resistant protective gloves

Eye protection:

Wear face shield or tightly fitting safety goggles (chemical goggles) if splashing hazard exists.

Body protection:

Body protection must be chosen depending on activity and possible exposure, e.g. head protection, apron, protective boots, chemical-protection suit.

General safety and hygiene measures:

Wear protective clothing as necessary to minimize contact. Handle in accordance with good industrial hygiene and safety practice. Keep away from food, drink and animal feeding stuffs. Take off immediately all contaminated clothing. Handle in accordance with good industrial hygiene and safety practice.

9. Physical and Chemical Properties

Form:	liquid	
Odour:	mild	
Colour:	colourless	
	No data available.	
pH value:	6 - 7	
	(as an emulsion)	
Boiling point:	> 149 °C	
	(1,013 hPa)	
:	No applicable information available.	
Flash point:	> 149 °C	(ASTM D93)
Autoignition:	No applicable information available.	
Vapour pressure:	< 0.13 hPa	
	(25 °C)	
Density:	1.01 g/cm ³	
	(25 °C)	
Relative density:	1.01	
	(25 °C)	
Vapour density:	No data available.	
Partitioning coefficient n-octanol/water (log Pow):	-1.58	(calculated)
Self-ignition temperature:	not self-igniting	
Thermal decomposition:	No data available.	
Viscosity, dynamic:	No data available.	
Viscosity, kinematic:	No applicable information available.	
% volatiles:	< 1 %	
Solubility in water:	dispersible	
Solubility (quantitative):	No applicable information available.	
Solubility (qualitative):	No applicable information available.	
Evaporation rate:	No applicable information available.	
Other Information:	If necessary, information on other physical and chemical parameters is indicated in this section.	

Safety Data Sheet

Industrol® DF 204

Revision date : 2019/09/12

Version: 4.0

Page: 5/8

(30220078/SDS_GEN_US/EN)

10. Stability and Reactivity

Reactivity

No hazardous reactions if stored and handled as prescribed/indicated.

Corrosion to metals:

No corrosive effect on metal.

Chemical stability

The product is stable if stored and handled as prescribed/indicated.

Possibility of hazardous reactions

No hazardous reactions when stored and handled according to instructions.

The product is chemically stable.

Conditions to avoid

Incompatible materials

strong oxidizing agents

Hazardous decomposition products

Decomposition products:

Hazardous decomposition products: No hazardous decomposition products if stored and handled as prescribed/indicated.

Thermal decomposition:

No data available.

11. Toxicological information

Primary routes of exposure

Routes of entry for solids and liquids are ingestion and inhalation, but may include eye or skin contact. Routes of entry for gases include inhalation and eye contact. Skin contact may be a route of entry for liquefied gases.

Acute Toxicity/Effects

Oral

Type of value: LD50

Species: rat

Value: > 2,000 mg/kg

Inhalation

No applicable information available.

Dermal

Type of value: LD50

Species: rabbit

Value: > 2,000 mg/kg

The product has not been tested. The statement has been derived from substances/products of a similar structure or composition. Literature data.

Skin

Species: rabbit

Safety Data Sheet

Industrol® DF 204

Revision date : 2019/09/12
Version: 4.0

Page: 6/8
(30220078/SDS_GEN_US/EN)

Result: non-irritant
Method: Draize test

Eye

Species: rabbit
Result: non-irritant
Method: Draize test

Chronic Toxicity/Effects

Repeated dose toxicity

Assessment of repeated dose toxicity: No applicable information available.

Symptoms of Exposure

12. Ecological Information

Toxicity

Aquatic plants

No data available.

Microorganisms/Effect on activated sludge

Toxicity to microorganisms

No data available.

Persistence and degradability

Elimination information

0 - 10 % DOC reduction (28 d) (OECD 301 A (new version)) (aerobic, activated sludge, domestic)
Not readily biodegradable (by OECD criteria).

Bioaccumulative potential

Bioaccumulation potential

No data available.

Mobility in soil

Assessment transport between environmental compartments

The substance will not evaporate into the atmosphere from the water surface.
Adsorption to solid soil phase is possible.

Additional information

Add. remarks environm. fate & pathway:
No data available.

13. Disposal considerations

Waste disposal of substance:

Safety Data Sheet

Industrol® DF 204

Revision date : 2019/09/12
Version: 4.0

Page: 7/8
(30220078/SDS_GEN_US/EN)

Dispose of in accordance with national, state and local regulations. It is the waste generator's responsibility to determine if a particular waste is hazardous under RCRA.

Container disposal:

Dispose of in accordance with national, state and local regulations.

14. Transport Information

Land transport

USDOT

Not classified as a dangerous good under transport regulations

Sea transport

IMDG

Not classified as a dangerous good under transport regulations

Air transport

IATA/ICAO

Not classified as a dangerous good under transport regulations

15. Regulatory Information

Federal Regulations

Registration status:

Chemical TSCA, US released / listed

EPCRA 311/312 (Hazard categories): Refer to SDS section 2 for GHS hazard classes applicable for this product.

Safe Drinking Water & Toxic Enforcement Act, CA Prop. 65:

WARNING: This product can expose you to chemicals including ETHYLENE OXIDE, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

NFPA Hazard codes:

Health: 1 Fire: 1 Reactivity: 0 Special:

HMIS III rating

Health: 1 Flammability: 1 Physical hazard: 0

16. Other Information

SDS Prepared by:

BASF NA Product Regulations
SDS Prepared on: 2019/09/12

Safety Data Sheet

Industrol® DF 204

Revision date : 2019/09/12

Page: 8/8

Version: 4.0

(30220078/SDS_GEN_US/EN)

We support worldwide Responsible Care® initiatives. We value the health and safety of our employees, customers, suppliers and neighbors, and the protection of the environment. Our commitment to Responsible Care is integral to conducting our business and operating our facilities in a safe and environmentally responsible fashion, supporting our customers and suppliers in ensuring the safe and environmentally sound handling of our products, and minimizing the impact of our operations on society and the environment during production, storage, transport, use and disposal of our products.

Industrol® DF 204 is a registered trademark of BASF Corporation or BASF SE
IMPORTANT: WHILE THE DESCRIPTIONS, DESIGNS, DATA AND INFORMATION CONTAINED HEREIN ARE PRESENTED IN GOOD FAITH AND BELIEVED TO BE ACCURATE, IT IS PROVIDED FOR YOUR GUIDANCE ONLY. BECAUSE MANY FACTORS MAY AFFECT PROCESSING OR APPLICATION/USE, WE RECOMMEND THAT YOU MAKE TESTS TO DETERMINE THE SUITABILITY OF A PRODUCT FOR YOUR PARTICULAR PURPOSE PRIOR TO USE. NO WARRANTIES OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, ARE MADE REGARDING PRODUCTS DESCRIBED OR DESIGNS, DATA OR INFORMATION SET FORTH, OR THAT THE PRODUCTS, DESIGNS, DATA OR INFORMATION MAY BE USED WITHOUT INFRINGING THE INTELLECTUAL PROPERTY RIGHTS OF OTHERS. IN NO CASE SHALL THE DESCRIPTIONS, INFORMATION, DATA OR DESIGNS PROVIDED BE CONSIDERED A PART OF OUR TERMS AND CONDITIONS OF SALE. FURTHER, YOU EXPRESSLY UNDERSTAND AND AGREE THAT THE DESCRIPTIONS, DESIGNS, DATA, AND INFORMATION FURNISHED BY OUR COMPANY HEREUNDER ARE GIVEN GRATIS AND WE ASSUME NO OBLIGATION OR LIABILITY FOR THE DESCRIPTION, DESIGNS, DATA AND INFORMATION GIVEN OR RESULTS OBTAINED, ALL SUCH BEING GIVEN AND ACCEPTED AT YOUR RISK.
END OF DATA SHEET